

The undersigned **A.B. Bazhukhin** acting head of division for export car sales hereby certifies that the vehicle:

0.1. Make:

LADA

0.2. Type:

GF

Variant:

K110111Y

Version:

3J5CCA0

0.2.1. Commercial name:

LADA VESTA

0.4. Vehicle category:

M1

0.5. Name and address of manufacturer:

PAO AVTOVAZ

Yuzhnoe Shosse 36

445024 Togliatti

RUSSIA

0.6. Location and method of attachment of the statutory plates:

on the right middle body pillar, bottom

Location of the vehicle identification number:

on the right middle body pillar, bottom

0.9. Name and address of the manufacturer's representative:

LADA Automobile GmbH
Erlengrund 7
21614 Buxtehude
GERMANY

0.10. Vehicle identification number:

XTAGFK110KYY286960

conforms in all respects to the type described in approval


issued on
e1*2007/46*1695*04
05.12.2018

and can be permanently registered in Member States having right hand traffic and using metric units for the speedometer.

Place: TOGLIATTI

Date: 31.01.2019


Signature:

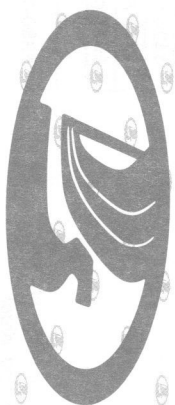

EG-CERTIFICATE OF CONFORMITY

CERTIFICATE DE CONFORMITÉ CE

EG-ÜBEREINSTIMMUNGSBESCHEINIGUNG

CERTIFICADO DE CONFORMIDAD CE

CERTIFICATO DI CONFORMITÀ CE

UA СЕРТИФІКАТ ВІДПОВІДНОСТІ

COMPLETE VEHICLES / EC CERTIFICATE OF CONFORMITY

General construction characteristics		Bodywork		4. All power trains, except pure electric vehicle, under Regulation (EU) 2017/1151	
1. Number of axles and wheels:	2 axles, 4 wheels	38. Code for bodywork:	AC	WLTP values	
3. Powered axles:	1 front	40. Colour of vehicle:	orange	CO ₂ emissions	
Main dimensions		41. Number and configuration of doors:	5 hinged doors	Fuel consumption	
4. Wheel base:	2635 mm	42. Number of seating positions:	5	Low: 225 g/km	
4.1. Distance between axes	1-2: 2635 mm	42.1. Seat(s) designated for use only when the vehicle is stationary:	not applied	Medium: 161 g/km	
5. Length:	4424 mm	42.3. Number of wheelchair user accessible position:	not applied	High: 148 g/km	
6. Width:	1785 mm	Environmental performances		Extra High: 174 g/km	
7. Height:	1537 mm	46. Sound level	51R03	Combined: 170 g/km	
Masses		Weighted, combined: -			
13. Mass of the vehicle in running order:	1330-1340 kg	47. Exhaust emission level:	75.2 dB(A)	51. For special purpose vehicles:	
13.2. Actual mass of the vehicle:	1340 kg	47.1. Parameters for emission testing	3750 min-1	52. Remark: alternative tyres /wheels/ rolling resistance class	
16. Technically permissible maximum masses:		47.1.1. Test mass, kg:	69.0 dB(A)	185/65 R15 (80T) / 6J x 15H2 / ≤ 9,7	
16.1. Technically permissible maximum laden mass:	1730 kg	47.1.2. Frontal area, m ² :	Euro-6d-Temp	195/55 R16 (80T) / 6J x 16H2 / ≤ 9,7	
16.2. Technically permissible mass on each axle:	1 - 900 kg 2 - 900 kg	47.1.3. Road load coefficients			
16.4. Technically permissible maximum mass of the combination:	2630 kg	47.1.3.0. f0, N:	110,6		
18. Technically permissible maximum towable mass in case of:		47.1.3.1. f1, N/(km/h):	1,018		
18.3. Centre-axle trailer:	900 kg	47.1.3.2. f2, N/(km/h):	0,03903		
18.4. Unbraked trailer:	600 kg	48. Exhaust emissions	715/2007*2017/1347AG EC		
19. Technically permissible maximum static vertical mass at the coupling point:	50 kg	Number of the base regulatory act and latest amending regulatory act applicable:			
Power plant		1.2. test procedure:			
20. Manufacturer of the engine:	PAO AVTOVAZ	CO:	Type I	Euro-6d-Temp	
21. Engine code as marked on the engine:	21129	THC:	813,9	mg/km	
22. Working principle:	positive ignition	NMHC:	40,5	mg/km	
	four stroke	NOx:	35,9	mg/km	
	no	THC + NOx:	17,1	mg/km	
23. Pure electric:	no	Particulates (mass):	-		
23.1. Hybrid [electric] vehicle:	no	Particulates (number):	-		
24. Number and arrangement of cylinders:	4 in line	48.1. Smoke corrected absorption coefficient:	-		
25. Engine capacity:	1596 cm ³	48.2. Declared maximum RDE values			
26. Fuel:	petrol 95 RON	Complete RDE trip:			
26.1. Mono fuel		Urban RDE trip:			
27. Maximum power:	75 kW at 5800 min ⁻¹	CO ₂ emissions / fuel consumption:			
27.1. Maximum net power:		1. All power train, except pure electric vehicles			
29. Maximum speed:	180 km/h	emissions			
Axles and suspension		consumption			
30. Axle(s) track:	1 - 1524 mm 2 - 1524 mm	urban conditions:			
35. Tyre / wheel combination / rolling resistance class	205/50 R17 (89V) / 6 1/2J x 17H2 / ≤ 9,7	extra-urban conditions:			
Brakes		combined:			
36. Trailer brake connections:	no	weighted, combined:			
		3. Vehicle fitted with eco-innovation(s):			